



DOUBLE SUCTION PUMP on concrete filled BMK Base with height saving brackets, high deflection SLF Spring Mounts and Z-1011 Seismic Restraints. Reinforced housekeeping pad secured by HPA Anchors. SAFEFLEX Expansion Joints are installed in pipelines to reduce blade frequency vibration and noise and to allow for seismic displacement.

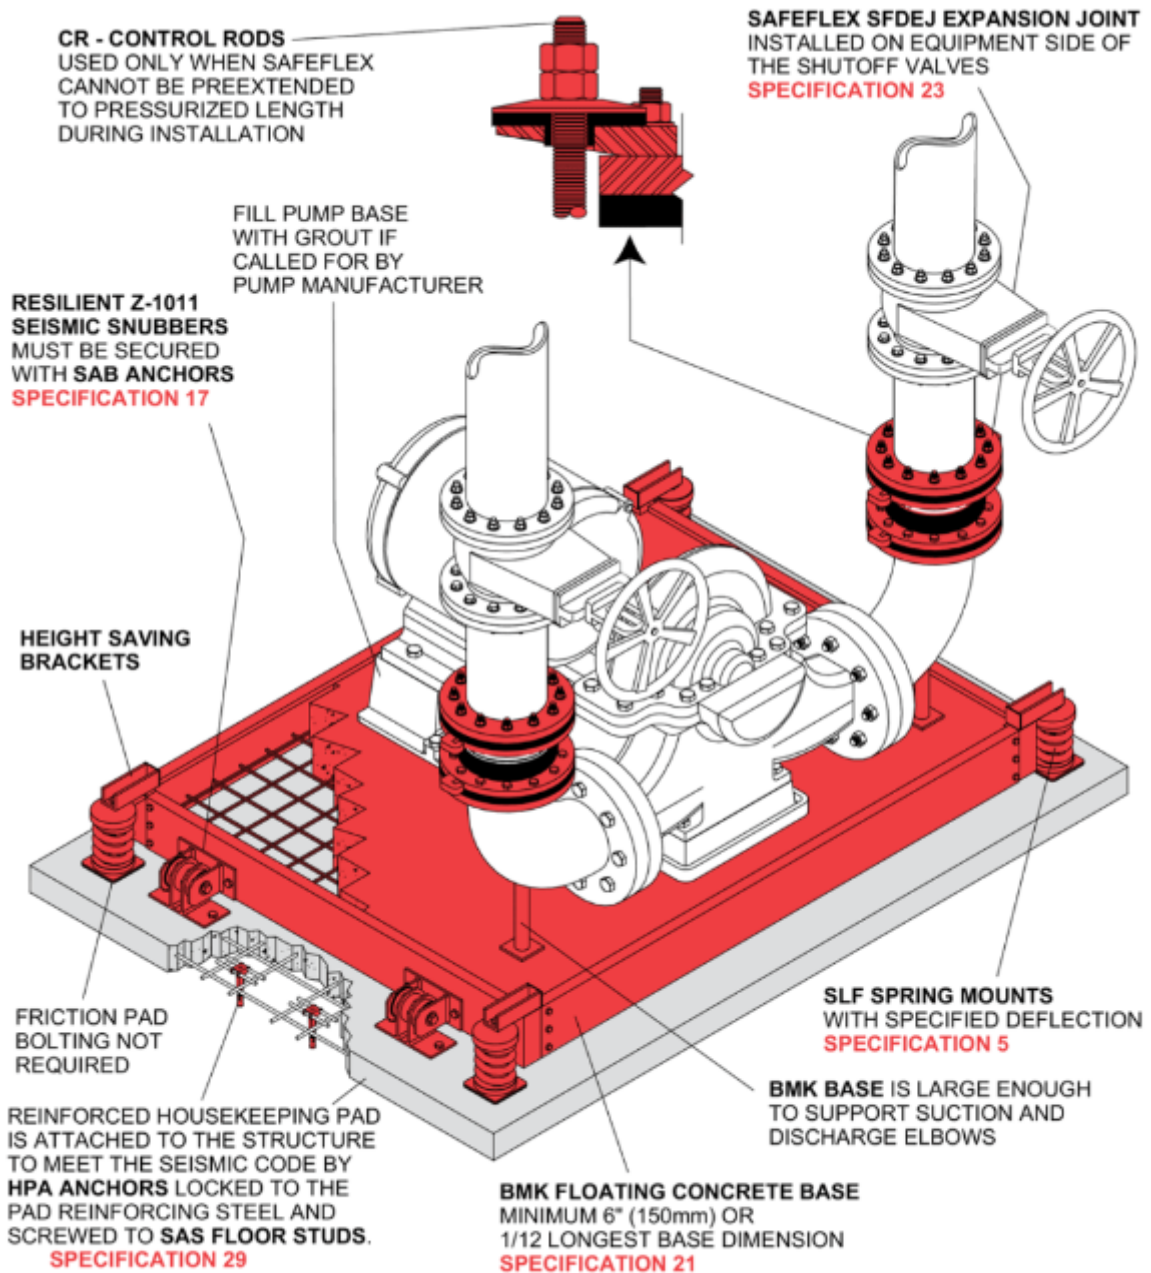

END SUCTION PUMP on WFSL Base with height saving brackets, MT Air Springs and Z-1011 Seismic Restraints. Reinforced housekeeping pad secured by HPA Anchors. SAFEFLEX Expansion Joints are installed in pipelines to reduce blade frequency vibration and noise and to allow for seismic displacement.

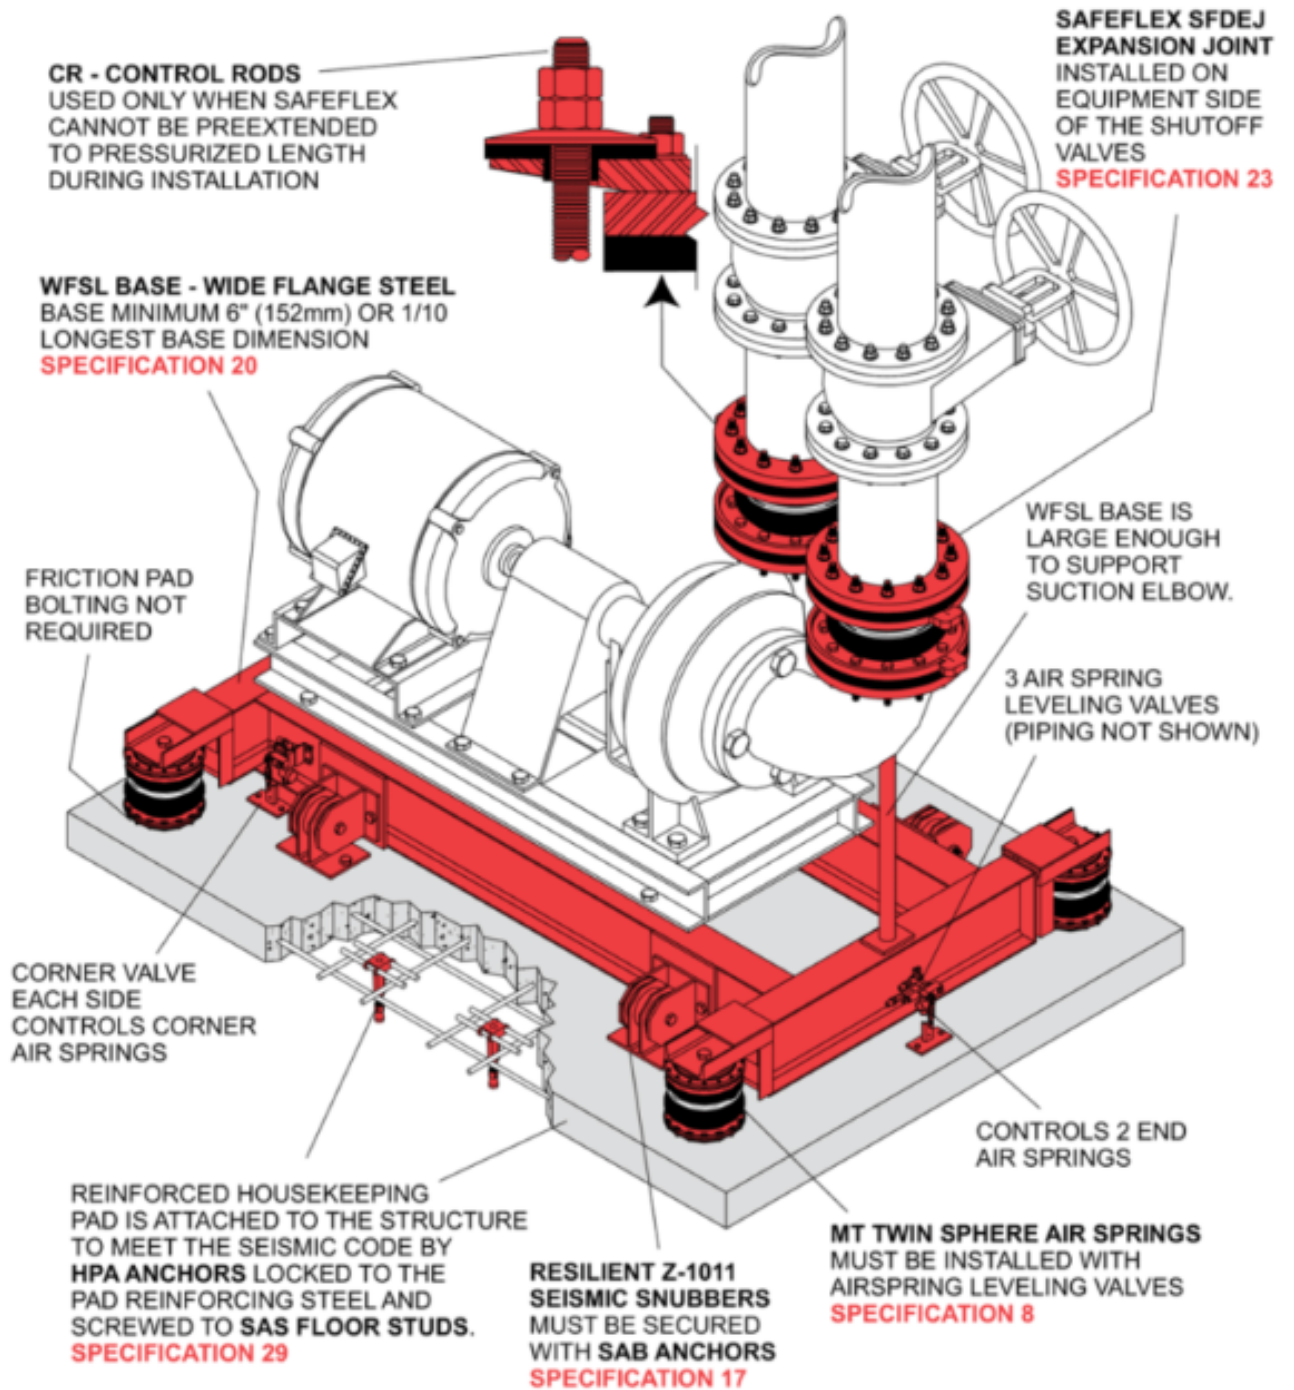

END SUCTION PUMP on WFSL Base with height saving brackets, high deflection SLF Mounts and Z-1011 Seismic Restraints. Reinforced housekeeping pad secured by HPA Anchors. SAFEFLEX Expansion Joints are installed in pipelines to reduce blade frequency vibration and noise and to allow for seismic displacement.

